

RC02 intelligent™ Remote Reprogrammer

RC 02 Parameter Adjustments

To adjust parameters,.... PRESS **MENU**. Every time the **MENU** Button is pushed it will 'Light UP' the **Detect Range**, **Detect Time**, **Detect Freq .**, **Warm-up** and **Run Time** selections.

To begin programming of settings, press.....**MENU**... .
to select **Detect Range**, then with UP / DOWN Button, select desired setting:Greatest Range = 15, Shortest Range = 1
*green LEDs = levels 1 - 8 ** red LEDs = levels 9 - 15.*


Next

- Press **MENU** to select **Detect Time**.
With UP / DOWN Button, select desired time from 0 -14 seconds
- Press **MENU** to select **Detect Frequency**.
With UP / DOWN Button, select desired frequency from 1-4.
- Press **MENU** to select **Warm-Up** time.
With UP/DOWN Button, select desired time from 1-15 (x2) = 2-30 seconds.
- Press **MENU** Button to select **Run Time**.
With UP/DOWN Button, select desired time from 1-15 seconds.
- Press **MENU** to select **Program** button.
The two adjacent Green **Program** buttons will light up.

You are now ready to re-program the unit.

Aim **RC02** directly in line with Infrared Lens and Press the **Program** Button. An Indicator Light in unit lens will 'BLINK 3 TIMES' to confirm unit has re-programmed.

The **RC02** will turn itself 'OFF' automatically after 5 minutes.
The last settings will be retained in memory.

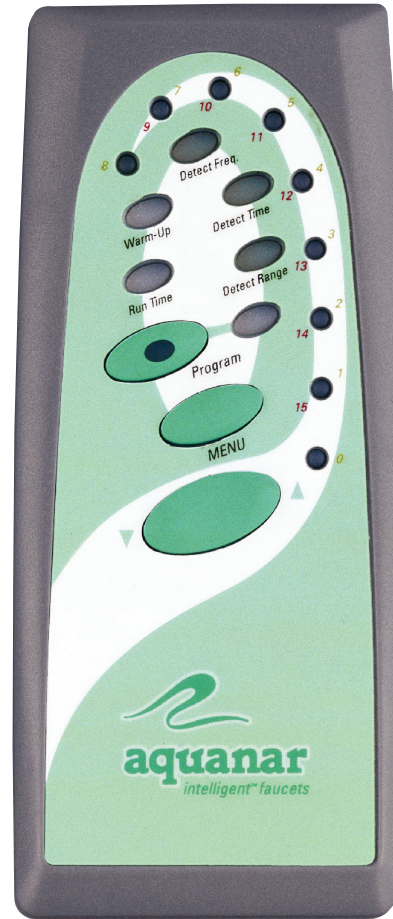

Power : 4.5 Vdc - Batteries - 3 x AAA

Factory Default Settings - All Aquanar Units

Functions	Shower	Faucets	Urinals	Toilets
Detect Range (1-15)	10	6	8	8
Detect Time (0-14 secs.)	2	0	6	6
Detect Frequency (1-4) **	1	1	1	1
Runtime (1-15 secs.)	4	2	6	4
Warm-up (1-15 *)	4	1	n/a	n/a

* 1 - 15 (x 2) = 2 - 30 sec.

** Detect Frequency 1-4 not applicable on DC models.